E-Z DRILL

International: +1 (405) 372-0121
Toll Free: (800) 272-0121
Email: sales@ezdrill.com

Specifications Model 210B-2

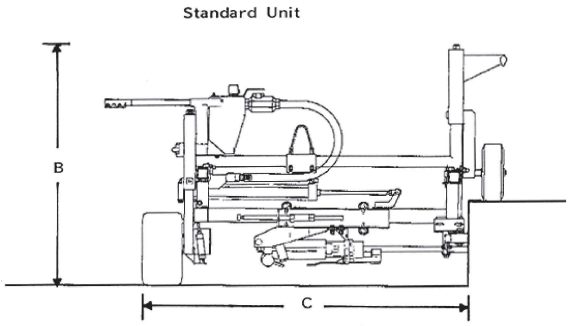

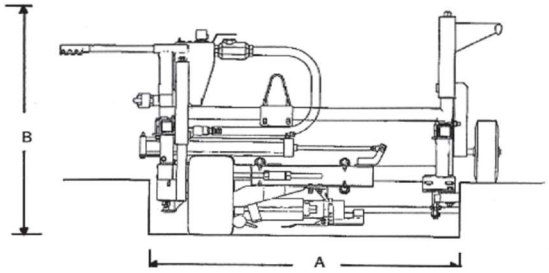

	Horizontal Position
Drill Depth	18” (45.7 cm)
Drill Depth w/ Dust Collection Kit	15 3/4” (40.0 cm)
Drill Bit Diameter	5/8” to 2 1/2” (15.9 mm to 63.5 mm)
Air Consumption (minimum)	200 cfm (5.7 m3/min)
Air Consumption w/ Dust Collection Kit (minimum)	260 cfm (7.4 m3/min)
Minimum Hose Size (ID)	1 1/4" (31.8 mm)
Operating Pressure at Drill Motor	90 psi (6.2 bar)
Drill Distance from Corner	6” (15.2 cm)
Drill Distance from Ground	3” (7.6 cm)
Length (A)	48” (121.9 cm)
Length (A) w/ Dust Collection Kit	50 1/2” (128.3 cm)
Length (C)	56” (142.2 cm)
Length (C) w/ Dust Collection Kit	58 1/2” (148.6 cm)
Overall Length	61” (154.9 cm)
Width	Varies
Height (B)	37” (94.0 cm)
Height w/ Dust Collection Kit	75 1/2” (191.8 cm)
Minimum Patch Size	48” (121.9 cm)
Minimum Patch Size w/ Dust Collection Kit	51” (129.5 cm)
Weight	550 lbs. (249.5 kg)
Weight w/ Dust Collection Kit	670 lbs. (303.9 kg)
Drill Motor (pneumatic)	CP 32A
Drill Motor Weight	54 lbs. (24.5 kg)
Chuck Size	7/8” x 3 1/4" (22.2 mm x 82.6 mm)
Impact (ft. lbs./blow)	36 fpb (48.8 J)
Blows/minute	2200 bpm
Rotations/minute	288 rpm

Specifications are subject to change without notice